

5471.00

Low Broadband Cross Polarized


POLARIZATION: X-Pol
 FREQUENCY (MHz): 806-960
 HORIZONTAL BEAM WIDTH (°): 65
 GAIN (dBi/dBd): 14.6/12.5, 15.0/12.9
 TILT: MET
 LENGTH: 1.3m (4'3")

ELECTRICAL SPECIFICATIONS*

Frequency range (MHz)	806-960	
Frequency band (MHz)	806-896	880-960
Gain (dBi/dBd)	14.6/12.5	15.0/12.9
Polarization	Dual linear ±45°	
Impedance (Ω)	50	
VSWR	1.5:1	
Horizontal beam width, -3 dB (°)	65	65
Vertical beam width, -3 dB (°)	15.3	14.2
Electrical down tilt (°)	2 to 12	
Side lobe suppression, vertical 1st upper (dB)	>19,18,17@2,7,12°	>19,18,17@2,7,12°
Isolation between inputs (dB)	30	30
Tracking, horizontal plane ±60° (dB)	<2.0	<2.0
First null fill (dB)	>-25	>-25
Vertical beam squint (°)	1	1
Front to back ratio (dB)	>25	>25
Front to back ratio, total power (dB)	>24	>25
Cross polar discrimination (XPD) 0° (dB)	-	-
Cross polar discrimination (XPD) ±60° (dB)	>10	>10
Far field coupling	-	-
IM3, 2xTx@43dBm (dBc)	<-150	
Power handling, average per input (W)	400	
Power handling, average total (W)	800	

MECHANICAL SPECIFICATIONS*


Connector	2 x 7/16 DIN Female
Connector position	Bottom
Dimensions, HxWxD, mm (ft)	1270x280x125 (4'2"x11"x4")
Mounting	Pre-mounted heavy duty brackets
Weight, with brackets, kg (lbs)	14.5 (31.9)
Weight, without brackets, kg (lbs)	9 (19.8)
Wind load, frontal/lateral/rear side 42 m/s Cd=1.6 (N)	859
Maximum operational wind speed, m/s (mph)	42 (93)
Survival wind speed, m/s (mph)	55 (123)
Lightning protection	DC grounded
Radome material	PVC
Radome colour	Light Grey
Package size, HxWxD, mm (ft)	1475x355x255 (4'10"x1'2"x10")
Shipping weight, kg (lbs)	18.5 (40.7)
RET	7010.00, 7011.00, 7012.00
Brackets	7256.00, 7454.00, 2210.10

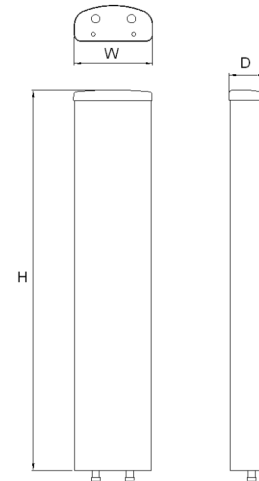

*All specifications subject to change without notice. Please contact your Powerwave representative for complete performance data.

ANTENNA PATTERNS*

For detailed patterns visit <http://www.powerwave.com/rpa/>.



925 MHz