

**8760.0ST.  
B100.00****Dual High Broadband Cross Polarized  
iRET**


POLARIZATION: X-Pol  
 FREQUENCY (MHz): 1710-2170  
 HORIZONTAL BEAM WIDTH (°): 65  
 GAIN (dBi/dBd): 18.1/16  
 TILT: Integrated Remote Electrical Tilt (iRET)  
 LENGTH: 1.3m

**ELECTRICAL SPECIFICATIONS\***

Frequency range (MHz)	1710-2170		
Frequency band (MHz)	1710-1880	1850-1990	1920-2170
Gain (dBi/dBd)	17.7/15.6	17.9/15.8	18.1/16
Polarization	Dual linear $\pm 45^\circ$		
Nominal Impedance ( $\Omega$ )	50		
VSWR	<1.4:1		
Horizontal beam width, -3 dB (°)	67	65	64
Vertical beam width, -3 dB (°)	7.1	6.8	6.2
Electrical down tilt (°)	0-10		
Side lobe suppression, vertical 1st upper (dB)	>22,20,18,16,14,14@0,2,4,6,8, 10°	>22,20,18,16,14,14@0,2,4,6,8, 10°	>22,20,18,16,14,14@0,2,4,6,8, 10°
Isolation between inputs (dB)	>30	>30	>30
Tracking, horizontal plane $\pm 60^\circ$ (dB)	<2.0	<2.0	<2.0
First null fill (dB)	>-24, typical >-18	>-24, typical >-18	>-24, typical >-18
Vertical beam squint (°)	<2.0	<2.0	<2.0
Front to back ratio (dB)	>28	>28	>28
Front to back ratio, total power (dB)	>28	>28	>28
Cross polar discrimination (XPD) 0° (dB)	>16	>16	>20
Cross polar discrimination (XPD) $\pm 60^\circ$ (dB)	>16	>13	>10
Far field coupling			
IM3, 2xTx@43dBm (dBc)	<-153	<-153	<-153
IM7, 2xTx@43dBm (dBc)	<-160	<-160	<-160
Power handling, average per input (W)	250		
Power handling, average total (W)	1000		

**MECHANICAL SPECIFICATIONS\***


Connector	4 x 7/16 DIN Female 2x AISG
Connector position	Bottom
Dimensions, HxWxD, mm (ft)	1320x343x100 (4'4"x1'1"x3")
Mounting	Pre-mounted heavy duty brackets
Weight, with brackets, kg (lbs)	19.5 (42.9)
Weight, without brackets, kg (lbs)	14 (30.8)
Wind load, frontal/lateral/rear side 42 m/s Cd=1.6 (N)	1093
Maximum operational wind speed, m/s (mph)	42 (93)
Survival wind speed, m/s (mph)	55 (123)
Lightning protection	DC grounded
Radome material	ASA
Radome colour	Light Grey
Package size, HxWxD, mm (ft)	1430x400x200 (4'8"x1'3"x7")
Shipping weight, kg (lbs)	23.5 (51.8)
RET	internal AISG 1.1
Brackets	7256.00, 7454.00, 2210.10

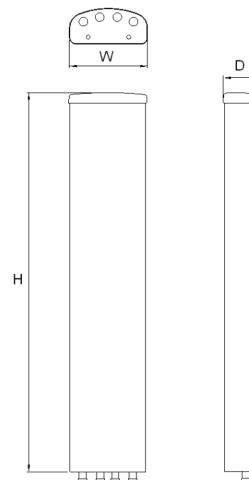

\*All specifications subject to change without notice. Please contact your Powerwave representative for complete performance data.

**ANTENNA PATTERNS\***

For detailed patterns visit <http://www.powerwave.com/rpa/>.



1850 MHz

2140 MHz