




TECHNICAL SPECIFICATION

Framework Grounding Kits for corrugated cable
(Copper or Aluminium outer conductor)

TSX-01

Page: 1/1

1. PRODUCT

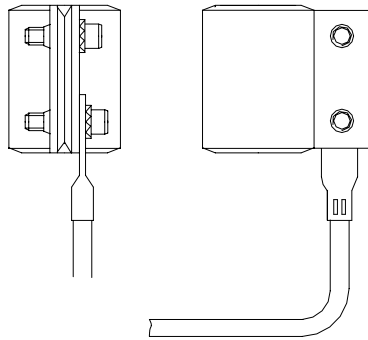

2. ELECTRICAL CHARACTERISTICS

Grounding Kit (Framework Type) able to bear or endure concussion electric current level reaching 70KA, and able to bear or endure work frequency high-handed level up to 30KV. They are specially designed to fit both Copper and Aluminium outer conductor coaxial cables.

3. MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

Bend Point σ_s , N/mm ²	Resist Pull Intensity σ bN/mm ²	Elongation δ 5, %
≥ 205	≥ 520	≥ 40

Waterproofing index : IP68

ROHS: compliance

4. TYPE

Number	Type	Weight (g/p)
Y0275X	1/4XF and 1/4F (ϕ 6.85*1000)	250
C0270X	3/8XF (ϕ 10.1*1000)	250
C0271X	1/2F (ϕ 16*1000)	260
C0272X	7/8F (ϕ 27*1000)	265
C0273X	1-1/4F (ϕ 39.5*1000)	270
C0274X	1-5/8F (ϕ 50*1000)	275

Prepared : LSW

Validation : LSC

Edition : C1- 04/09/2008

DIVISION TELECOMMUNICATION - 52, rue du Montparnasse - 75014 PARIS

France Tel : +(33) 1 42 79 14 00 - Fax (33) 1 42 79 15 00

DTLC@acome.fr - Website : www.acome.fr